

EL

EL320.256-F6 and -FD6

320 x 256 Pixel

Low Power Electroluminescent Display

Product Profile

The EL320.256-F Series displays are low power, rugged, electroluminescent (TFEL) displays which replace the bulky CRT in control and instrument product designs. They feature integral DC/DC converter, and their compact dimensions save space that can allow addition of features or reduction in overall size. They are designed to function in extreme environments, and their crisp display is viewable under most lighting conditions at wide viewing angles. Their ease of installation reduces system integration costs.


The EL320.256-F6 and -FD6 are 320 column by 256 row flat panel displays with a resolution of 80 dots per inch. The pixel aspect ratio is 1:1. The digital flat panel interface is designed to match the needs of most systems. The display may be driven at frame rates up to 75 Hz.

The EL320.256-F Series displays require +5 V and +11 to +30 V (Vcc1, Vcc2) power and four basic signals to operate:


1. Video Data or pixel information (VID)
2. Video Clock, pixel clock, or dot clock (VCLK)
3. Horizontal Sync (HS)
4. Vertical Sync (VS).

EL Technology

The display consists of an electroluminescent glass panel and two mounted circuit boards with control electronics.

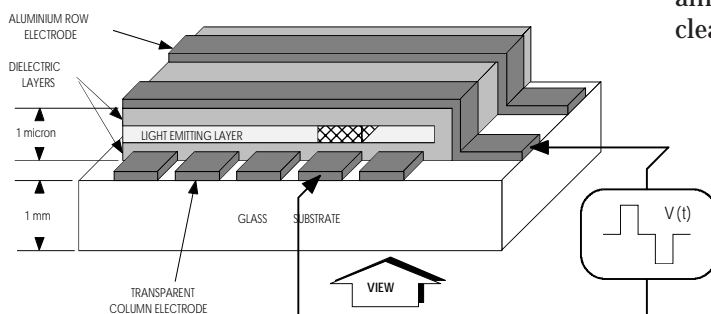

Operations Manual

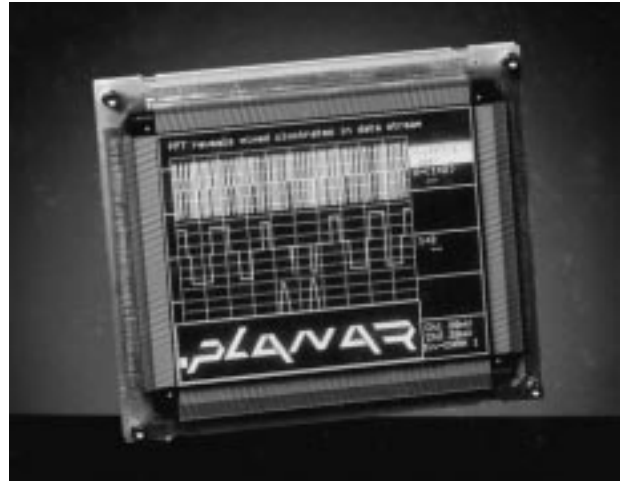

The EL glass panel is a solid-state device with a thin film luminescent layer sandwiched between transparent dielectric layers and a matrix of row and column electrodes. The row electrodes, in back, are aluminium; the column electrodes, in front, are transparent. The entire thin film device is deposited on a single glass substrate. The glass panel is mounted to an electronic circuit assembly board (ECA) with an elastic spacer. The ECA's are connected to the EL glass panel with soldered lead frames. The result is a flat, compact, reliable and rugged display device.

The EL320.256-FD6 display includes a dark ICE (Integrated Contrast Enhancement) background in the display glass. ICE background significantly improves the luminance contrast of the display in bright ambients. ICE also removes the halo around the lit pixels in dark ambient making the appearance of each pixel crisp and clear.

In the EL320.256-F Series, the 320 column electrodes and 256 row electrodes are arranged in an X-Y formation with the intersecting areas performing as pixels. Voltage is applied to both the correct row electrode and the correct column electrode to cause a lit pixel. Operating voltages required are provided by an integral DC/DC converter.

PLANAR[®]
The Definition of Quality[®]

Electrical Characteristics

Connector Layout

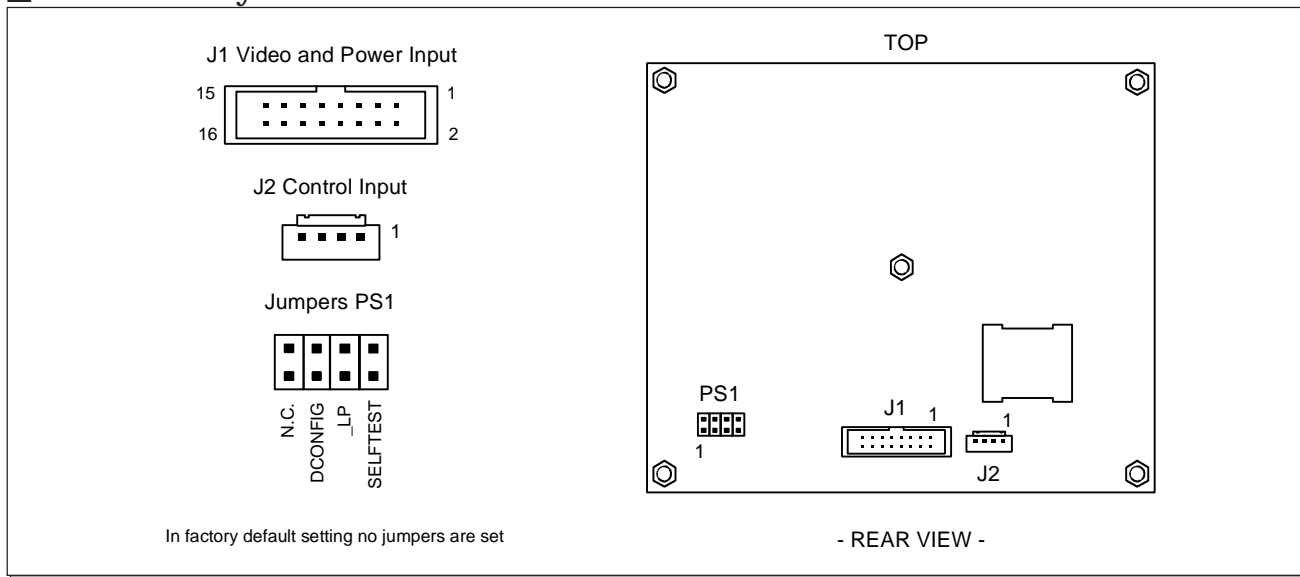


Fig 1. The input connectors and programmable jumpers on EL320.256-F6 and -FD6 displays.

Input Connectors and Programmable Jumpers

Pins	Signal	Symbol	Description
J1 (Data / power input connector)			
1, 2	Voltage	Vcc2	Supply voltage (+11...30 V) converted to required internal high voltages.
3, 4	Voltage	Vcc1	Supply voltage (+5 V) for the logic.
5	Enable	_ENABLE	Display operation is enabled when LOW or left disconnected.
6, 8, 10			
12, 14, 16	Ground	GND	Signal and power return.
7	Two bit data	TVID	Odd column data input for optional two bit parallel mode. See page 3.
9	Vertical Sync	VS	The vertical sync signal VS controls the vertical position of the picture. The topmost row displayed is the first HS HIGH time ending after the rising edge of the VS.
11	Horizontal Sync	HS	The horizontal sync signal HS controls the horizontal position of the picture. The last 320 pixels before the fall of HS are displayed.
13	Video Clock	VCLK	The VCLK signal shifts data present on the VID and TVID lines into the display system. VCLK is active on the rising edge.
15	Video Data	VID	Signal that supplies the pixel information to the system. Even pixel data for two pit parallel mode. See page 3.
J2 (Control input)			
1	Luminance	LCb	Brightness control inputs a and b. If left disconnected, luminance is at its maximum level. See brightness control on page 3
2	Luminance	LCb	
3	Ground	GND	Signal return. Same as GND in connector J1.
4	Low Power	_LOWPOW	If pulled LOW display is in Low Power Mode. Display has its normal brightness if HIGH or left disconnected. See page 3
Pinstrip PS1			
1		NC	No Connection
2	Two bit parallel	DCONFIG	The video data is input two pixels per video clock using VID and TVID if jumper is set.
3	Low Power	_LP	Low Power Mode is selected when jumper is set. This function overrules _LOWPOW control input.
4	SELFTEST		When set, video data input in VID and TVID is displayed asynchronously.

■ Connectors

J1	16-pin header mating	ODU 511.066.003.016 or eq. ODU 517.065.003.016 or eq.
J2	4-pin header mating protector	Hirose DF1–4P–2.5 DSA or eq. Hirose DF1–4S–2.5 R 24 or eq. Hirose DF1–4A 1.33

■ Control basics

The EL panel has 320 transparent column electrodes crossing 256 row electrodes in an X-Y fashion. Light is emitted when an AC voltage is applied at a row-column intersection. The display operation is based on the symmetric, line at a time data addressing scheme which is synchronized by the external VS, HS, and video clock input signals. The signal inputs are HCT compatible with 100 Ω series resistors.

■ Power Input

The input voltages needed are the +5 V input (Vcc1) for the logic and the +11...+30 V input (Vcc2) for the DC/DC converter generating all internal high voltages.

Display Features

■ Low Power Mode

The power consumption of the display is possible to be reduced typically to 3 W by using the low power Mode. This mode is selected either with `_LP` jumper (PS1/3) or temporarily with `_LOWPOW` control input (J2/4). The `_LP` jumper overrules the control input.

Low Power Mode is selected when `_LP` jumper is set or `_LOWPOW` input is pulled LOW. When `_LP` is open and `_LOWPOW` is HIGH or left disconnected, the display has its normal brightness. This function slightly reduces the contrast and average brightness of the display.

■ Two-Bits-Parallel

For reduction of data clock frequency, it is possible to input the data of two pixels per pixel clock. This feature is selected with `DCONFIG` jumper (PS1/2). If the jumper is set, data for even columns is input in VID and data for odd columns is input in TVID. If jumper is open, data is input normally to VID only.

■ Brightness Control

The brightness of the display can be adjusted from below 10 % up to full brightness by a 50 k Ω external logarithmic potentiometer between LCa and LCb control inputs (J2/1 and /2). The control function is achieved by sinking a small current from LCa to LCb (when open, the voltages are at 5 V and 0 V respectively).

If the two inputs are left disconnected, the brightness is at its maximum level.

■ Self Test

The operation of the display can be easily tested using the two self test features:

When `SELFEST` jumper (PS1/4) is set, the video data at VID and TVID are displayed asynchronously without the use of any timing signals.

When only supply voltages without any video data are input, the display starts scanning with all pixels on except the leftmost half of the topmost row.


■ Input specifications

Parameter	Symbol	Min.	Typ.	Max.	Absolute min./max.
Logic input HIGH		2.0 V	—	Vcc1	Vcc1 + 0.5 V Abs. max.
Logic input LOW			—	0.8 V	– 0.5 V Abs. min.
Supply voltage	Vcc1	4.75 V	5.0 V	5.25 V	6.0 V Abs. max.
Supply current at 5 V	Icc1	—	0.1 A	0.2 A	
Supply voltage	Vcc2	10.8 V	—	30 V	33 V Abs. max.
Supply current at 12 V	Icc2	—	0.3 A	0.6 A	
Supply current at 12 V (Low Power)	Icc2	—	0.2 A	0.4 A	
Power consumption			4 W	8.2 W	
Power consumption (Low Power)			3 W	5 W	

Operating conditions: Ambient temperature 25°C @ 60 Hz.

Note: Absolute maximum ratings are those values beyond which damage to the device may occur. The minimum and maximum specifications in this Operations Manual should be met, without exception, to ensure the long-term reliability of the display. Planar does not recommend operation of the display outside these specifications.

■ Timing Characteristics

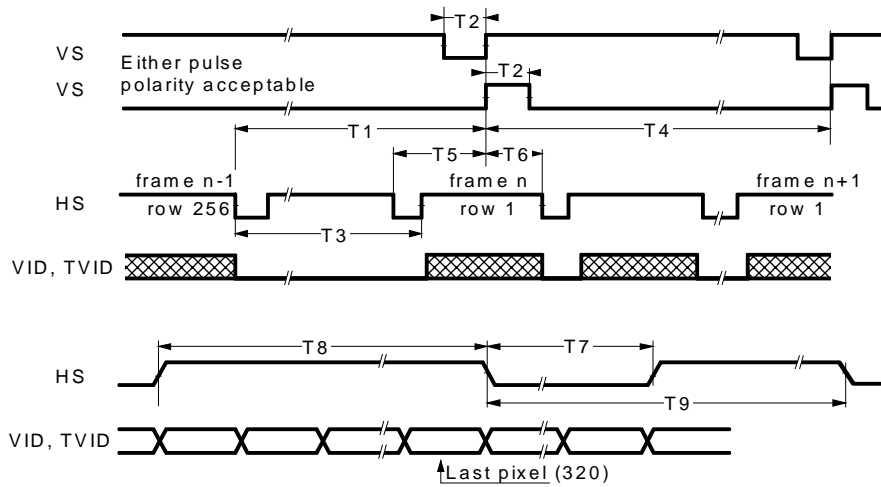


	min	max	unit	Note		min	typ	unit	Note
T1 Vertical Front Porch	100		μs	1	T5 HS setup to VS	1		μs	3
T2 VS HIGH/LOW time	30		ns	2	T6 HS hold from VS	3		μs	
T3 Vertical Blank	70		μs		T7 HS Low Time	4		tVCLK	
T4 Vertical Period	256		tHS		T8 HS High Time	320	320	tVCLK	4
VS frequency		75	Hz		T9 HS period (tHS)	51		μs	

Notes:

1. This time is needed to display the last row and to initiate the following frame.
2. Only rising edge is used.
3. 2 tVCLK minimum
4. The number of VCLK pulses during HS high time must be even. Video clock VCLK must be kept running continuously.

■ Setup and hold timing

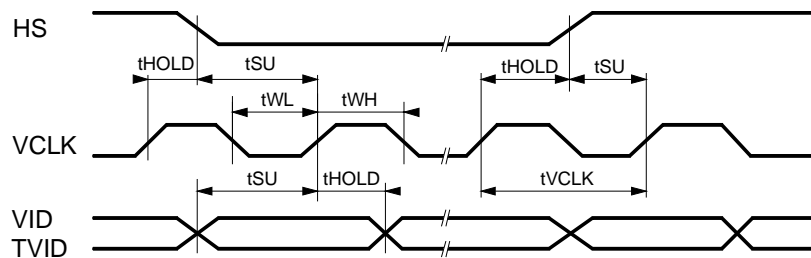

symbol		min.	max.
tSU	HS, VID, TVID setup to VCLK	5 ns	
tHOLD	HS, VID, TVID hold from VCLK	8 ns	
tWL	VCLK low width	16 ns	
tWH	VCLK high width	16 ns	
tVCLK	VCLK period	40 ns	
	VCLK frequency		25 MHz

Operational Specifications

■ Environmental

Temperature

Operating	–25...+65°C
Non-operating	–40...+85°C
Operating Survival	–40...+70°C (no permanent damage)

Humidity

Relative Humidity	+40°C, 93% RH, Operating (IEC 68-2-3)
Damp Heat	+25...+55°C, 95% RH, Non operating (IEC 68-2-30)

Altitude

15 000 m (50 000 ft.)
above sea level
Standard IEC 68–2–13

Vibration

20...500 Hz
ASD level 0.05 g²/Hz
30 min each axis
Standard IEC 68–2–36, Random Vibration,
Test Fdb

Shock

Magnitude 100 g
Duration 4 ms (half sine wave)
Number of shocks 18 (3 on each of the
6 surfaces)
IEC 68-2-27, test Ea

Reliability

MTBF > 50 000 h @ 25°C

Safety

The display will not inhibit the end product from obtaining any of the following certifications:

UL544, IEC 601.

Electromagnetic Compatibility

The display is capable of operating in an end product that complies with:

EN55022 Class B, FCC Part 15J Class B.

■ Optical

Determined at 60 Hz frame rate at 25°C ambient.

Display colour

Wide band amber (ZnS:Mn)
Peak wavelength 580 nm typ.

Areal Luminance

On luminance (typ)	–F6	77 cd/m ² (22.4 fL)
	–FD6	25 cd/m ² (7.3 fL)
On luminance (min.)	–F6	55 cd/m ² (16.0 fL)
	–FD6	22 cd/m ² (6.4 fL)
Low power (min.)	–F6	45 cd/m ² (13.1 fL)
	–FD6	18 cd/m ² (5.2 fL)

Measured at the center and the four corners of the screen.

On luminance non-uniformity 20% max.
Low power 26% max.
= (1– min. luminance/max luminance) x 100.
Maximum difference between any two of five points (center and four corners)

On luminance variation (time) 10% max.
in 15 000 h at 25°C

On luminance variation (temp.) 15% max.
over –25...+65°C range.

Luminance Contrast Ratio

–FD6 12:1 typ. @ 500 lx
3:1 typ. @ 3 000 lx

Illuminance	Classification
100 ... 1 000 lx	office
1 000 ... 10 000 lx	bright
10 000 ... 100 000 lx	sunlight

Viewing Angle

160° min.

Optional Filter

The luminance contrast of EL320.256–FD6 is sufficient for operation without any contrast enhancement. An anti-reflective coating or protecting sheet with anti-reflective treatment is recommended. For best overall performance of the –F6 in high ambient luminance levels, a neutral gray circular polarizing filter with anti-reflecting coating or etch is recommended. This filter will make the reflecting electrodes of the display darker and will improve the contrast ratio.

Mechanical Characteristics

■ Display External Dimensions

Figs. 3 shows the mechanical dimensions of a standard EL320.256-F6 and -FD6 display unit.

Height	110 mm	4.33 in.
Width	130 mm	5.12 in.
Depth	31.0 mm	1.22 in.
Weight	260 g max.	9.2 oz.

The EL320.256-F6 and -FD6 are mechanically compatible with other Planar MD320.256 and EL320.256 displays.

■ Display Viewing Area Characteristics

Active area			
Height	76.7 mm	3.02 in.	
Width	95.9 mm	3.77 in.	
Pixel pitch			
Height	0.30 mm	0.012 in.	
Width	0.30 mm	0.012 in.	
Pixel size			
Height	0.21 mm	0.008 in.	
Width	0.21 mm	0.008 in.	
Pixel fill factor	49 %		
Pixel matrix	320 horizontal by 256 vertical		

Caution

The ambient temperature of the display should not be allowed to exceed the environmental specifications (see page 9). In most applications, an air gap of min 5 mm is recommended (see mechanical drawings). Some applications may require, however, a larger air gap or cooling of the display unit in the system. Note that this may slightly increase the total depth of the design.

In order to ensure mechanical compatibility with future revisions of the display, it is highly recommended not to intrude in the component envelope by any part of the customer application.

Warning

The product generates potentially dangerous voltages capable of causing personal injury (high voltage pulses up to 195 Vac). Do not touch the display electronics during operation !

Electrostatic Caution

The Planar display uses CMOS and power MOS-FET devices. These components are electrostatic sensitive. Unpack, assemble and examine this assembly in a static-controlled area only. When shipping use packing materials designed for protection of electrostatic-sensitive components.

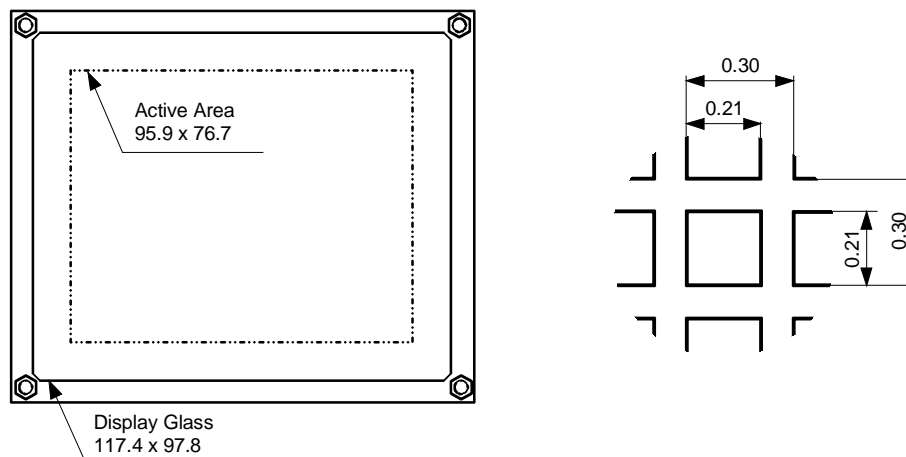


Fig 2. EL320.256-F6 and -FD6 display viewing area characteristics.

Installation and Handling

The product should be mounted using the M3 insert nuts on the ECA. Beside the four corner nuts it is recommended to use also the center nut in the mounting, if the vibration or shock stress is severe.

Before touching the display, necessary precaution must be taken to prevent application of static charges on the display from the operator or tools.

The display is made of glass material and should be handled with proper care. Do not drop the display or allow hard objects to strike its surface.

NOTE: For trouble-free data transfer a maximum cable length of 300 mm (12 in.) from data transmitter to display input connector is recommended. If longer cables up to 2 m (80 in.) length are needed, a serial resistor of appr. 100 Ω could be placed at each of the four signal line outputs of the transmitter in order to lower signal reflections.

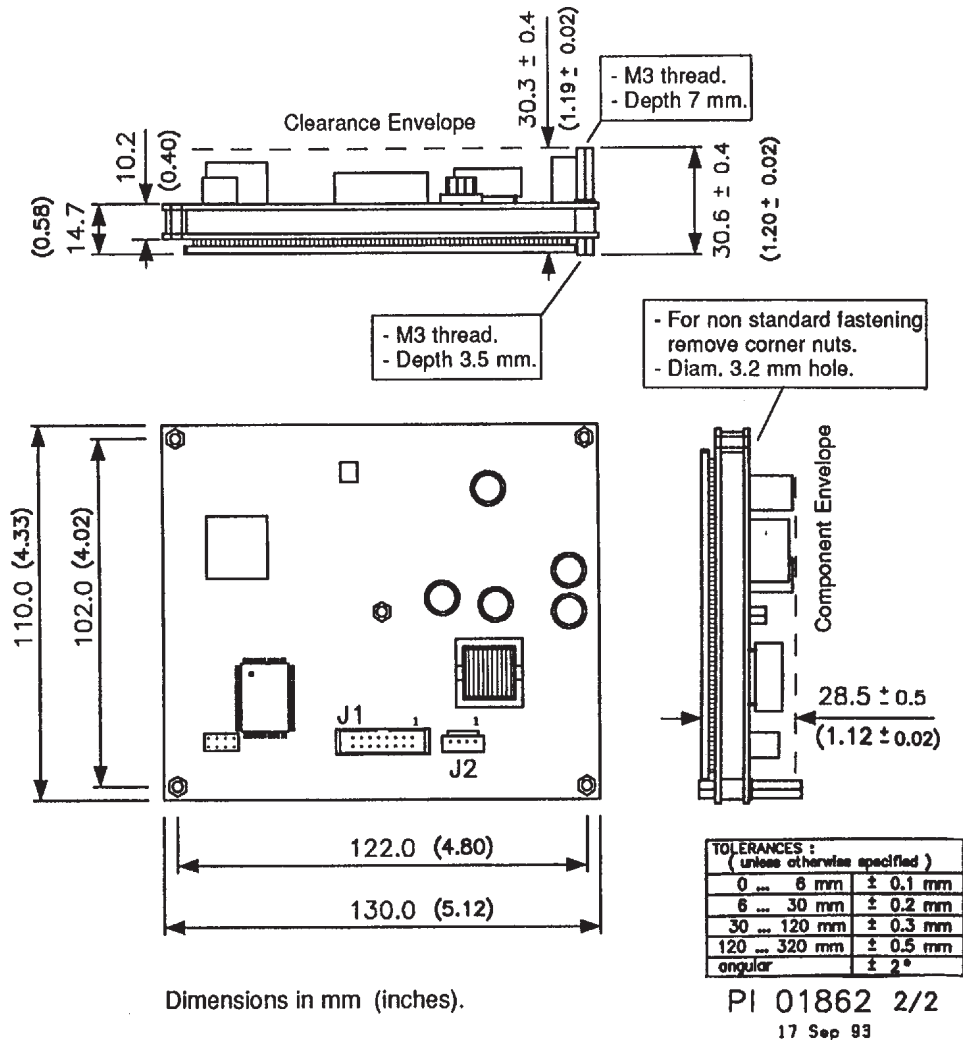


Fig 3. EL320.256-F6 and -FD6 display mechanical dimensions.

Description of Warranty

This description is not the full warranty, and should not be construed as a substitute for the full warranty. A copy of the full warranty is available upon request.

Planar warrants that the goods it sells will be free of defects in materials and workmanship, and that these goods will substantially conform to the specifications furnished by Planar, and to any drawings or specifications furnished to the Seller by the Buyer if approved by the Seller. This warranty is effective only if Planar receives notice of such defect or nonconformance during the period of warranty, which begins the day of delivery.

The goods Planar sells are warranted for a period of one year unless otherwise agreed to by Planar and the Buyer. The Buyer must return the defective or non-conforming goods, upon request, to Planar not later than 30 days after Planar's receipt of notice of the alleged defect or non-compliance. Buyer shall prepay transportation charges, and Planar shall pay for return of the goods to the Buyer. No goods are to be returned to Planar without prior written permission.

The warranty does not apply in cases of improper or inadequate maintenance by the Buyer, unauthorized modification of the goods, operation of the goods outside their environmental specifications, neglect or abuse of the goods, or modification or integration with other goods not covered by a Planar warranty when such modification or integration increases the likelihood of damage of the goods.

■ Represented by:

Easy to Use

There are many options available which make Planar flat panel displays easy to use, easy to interface, and easy to package. Call Planar for complete information.

Support and Service

Planar is a US company based in Beaverton, Oregon and Espoo, Finland with a world-wide sales distribution network. Full application engineering support and service are available to make the integration of Planar displays as simple and quick as possible for our customers.

RMA Procedure: Applying for a Returned Material Authorization number, please contact Planar International Ltd., or Planar Systems, Inc., with the model number(s) and original purchase order number(s). When returning goods for repair, please include a brief description of the problem, and be sure to mark the outside of the shipping container with the RMA number.

Ordering Information

EL320.256-F6

EL320.256-FD6 ICE display

Options Available

EL320.256-FD6 AG ICE display with optically bonded anti-glare film

Design and specifications subject to change without notice.